

Concealed cisterns for floor-standing WC



MONOLITH 9.0 technical data sheet
Standard code 375409

Sommario

DESCRIPTION	3
FEATURES	3
TECHNICAL NOTES	3
DIMENSIONS	3
STANDARD SUPPLY	5
ON DEMAND	5
PACKAGING	5
ACCESSORIES AND SPARE PARTS	6
LIST	7

Monolith 9.0

Concealed cistern for floor-standing WCs, max. capacity 9lt

DESCRIPTION

Concealed cistern for floor-standing or squat WC (with dedicated extension).

FEATURES

Features and plus



For floor-standing Wc (or squat wc with dedicated extension)



9lt in-wall cistern (adjustable to 6lt)



Dual flush with adjustable partial flush (from 2.5 to 3.5lt)



Maintenance operations in 3 minutes



Assembly operations in 8 minutes



FLEXVALVE



Monoblock container



Lago system



NORMA-PLUS float valve, acoustic cl.1, LGA-TUV (standard for code 375409)




100% Made in Italy

TECHNICAL NOTES


- 9lt high density PE monoblock container with a nominal thickness of 80mm and without joints
- Repairable in case of accidental drilling
- Plaster holder fixing mesh (according to code)
- Extruded closed-cell PE insulation, anti-condensate and soundproofing with thermal resistance
- FlexValve: discharge valve with silicon gasket. Made of polypropylene with silicone additive (PTE)
- NORMA-PLUS float valve, acoustic class 1, LGA-TUV approved, adjustable between 9 and 6lt (standard for code 375409)
- Maintenance operations without using tools
- Pneumatisable without the need to replace internal components

S

DIMENSIONS

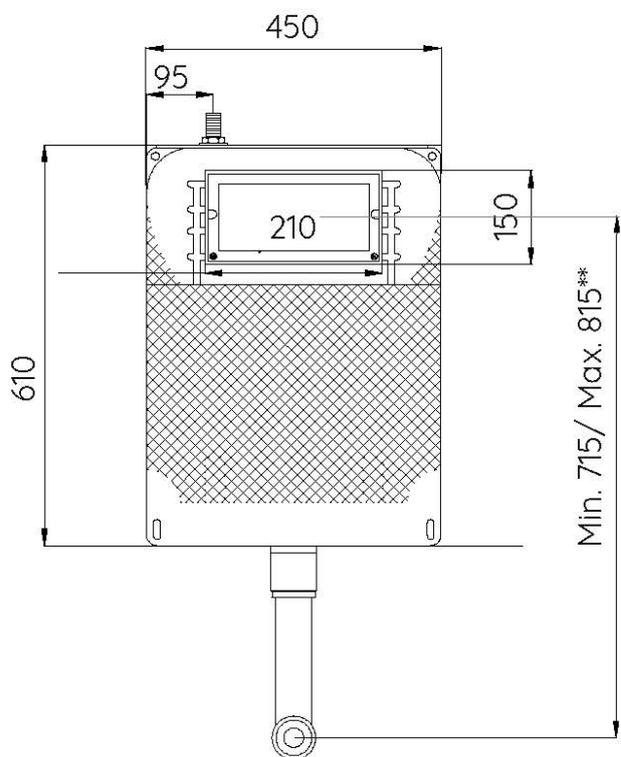

** con prolunga cod 305118 max 1020
 ** with extension code 305118 Max 1020

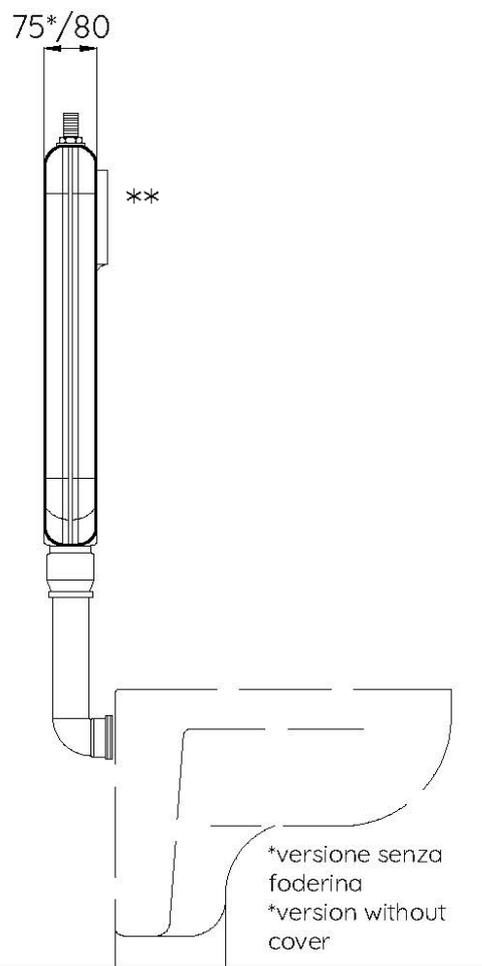

** Min. 0.5 mm di muro
 ** Min. 0.5 mm of wall

STANDARD SUPPLY

- Dismountable stop valve 3/8"-3/8" including fitting 1/2"-3/8"
- Adjustable discharge pipe up to 100 mm with polystyrene cover and conical gasket
- Protection template to shape perimeter of tiles or plaster
- Construction site protection cap for discharge pipe

IT NEEDS TO BE INTEGRATED WITH DUAL COUNTERPLATE COD. 317010

S


ON DEMAND

- Dual counter-plate
- Dual flush plate Fidia/Itaka/Aurea
- Wall mounting kit
- Pipe with rosette
- Squat WC extension
- Pneu system

PACKAGING

CODE	PCS	LxDxH	KG
375409	1	550x111x820 mm	3,9

ACCESSORIES AND SPARE PARTS

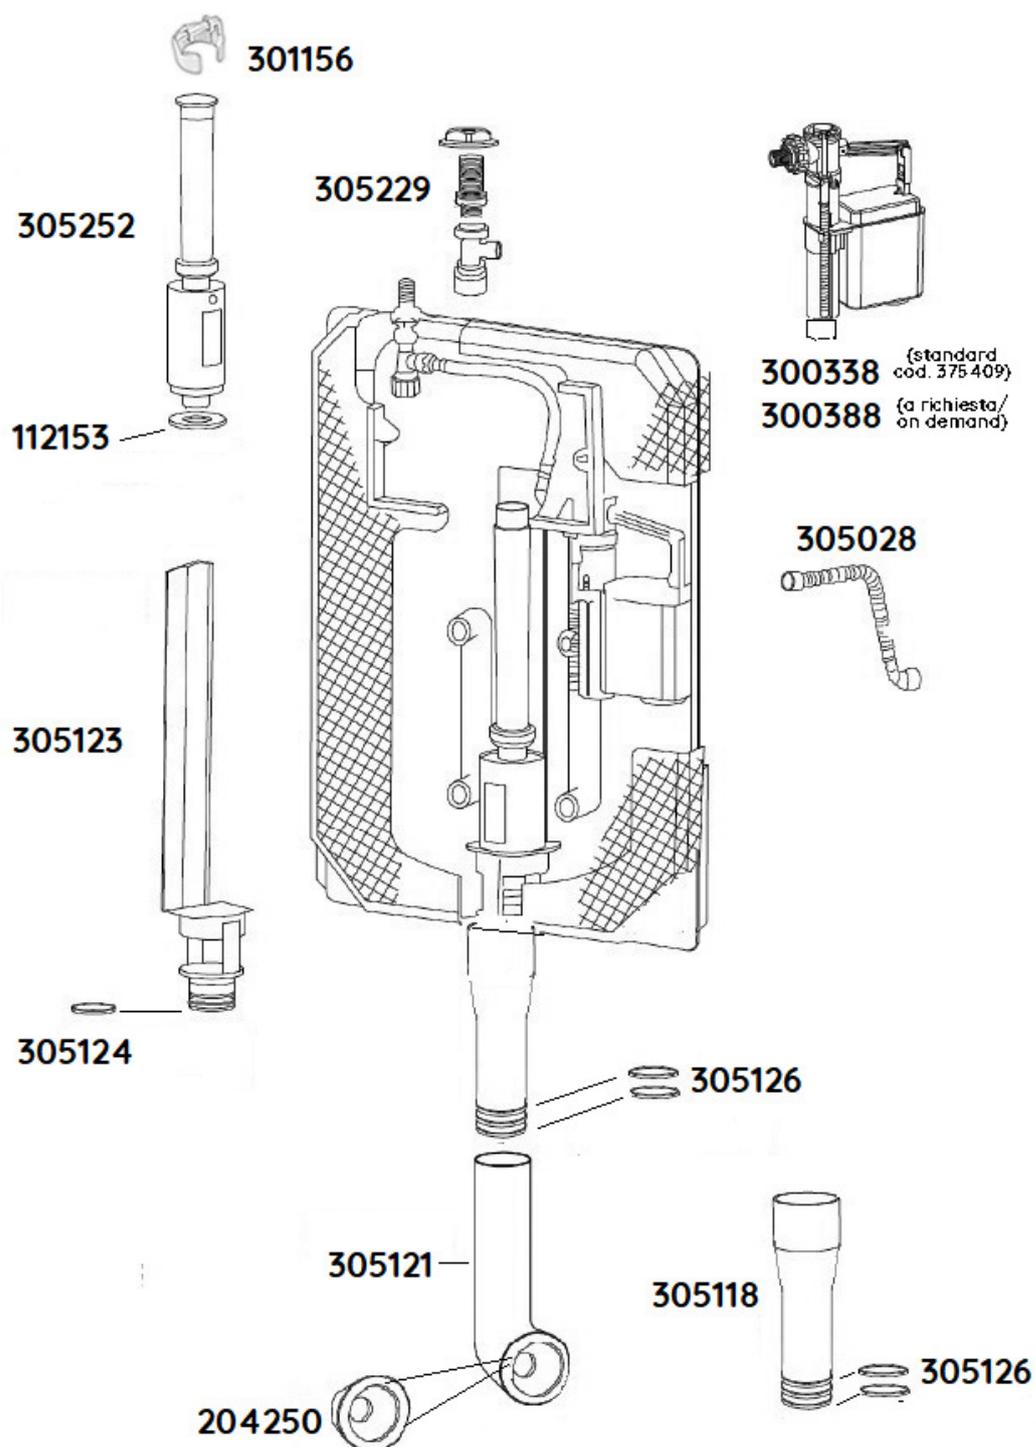

ACCESSORI INCLUSI
INCLUDED



cod 300388



cod 300338*



cod 305229



cod 305121



cod 301156
cod 305252



cod 305123

NON INCLUSI
NOT INCLUDED



cod 317010
controplacca duo - counter plate

Aurea
Fidia
Itaka



Placca comando
Control plate

ACCESSORI A RICHIESTA
ON DEMAND



cod 204006
Ø 40



cod 204001
Ø 32



cod 368403



cod 305118



cod. 400190

cod. 400195



cod. 400194

cod. 400197

LIST

Monolith 9.0	
CODE	DESCRIPTION
305229	Dismountable brass stop valve 3/8"-3/8" including fitting 1/2"-3/8"
305028	Flexible hose with gasket L. 280 mm 3/8" - 3/8"
300388	Norma float valve 3/8" for concealed cisterns (on demand according to the code)
300338*	NORMA-PLUS float valve 3/8" for concealed cisterns, acoustic cl.1, (standard for code 375409)
305123	9.0 removable drain with O-ring gasket
305118	Straight extension pipe Ø 50xh210 mm with o-ring for discharge pipe (on request for squat toilets)
305124	O-ring gasket for 9.0 drain

Monolith 9.0	
301156	Red anchor
112153	Silicon gasket for discharge valve \varnothing 60/21 mm
305121	Insulated discharge pipe, complete with conic gasket
204250	Universal conic gasket \varnothing 60x32/40 mm
305126	O-ring gasket for discharge pipe coupling
204001	WC connection pipe with rosette and clamp gasket \varnothing 32 mm
204006	WC connection pipe with rosette and clamp gasket \varnothing 40 mm
368403	Fixing brackets (on demand)
305252	Monolith 9.0 discharge valve
400190	Pneu transforming kit with aluminium inspection plate and remote white hand-button
400194	Pneu transforming kit with aluminium inspection plate and remote inox leg-button
400195	Pneu transforming kit with aluminium inspection plate and remote white plastic leg-button for floor/wall
400197	Pneu transforming kit with aluminium inspection plate and remote white hand-button